


PLASTIC CLIP SPACER 75mm

HEAVY-DUTY PLASTIC CLIP SPACER (SNAP CHAIR)

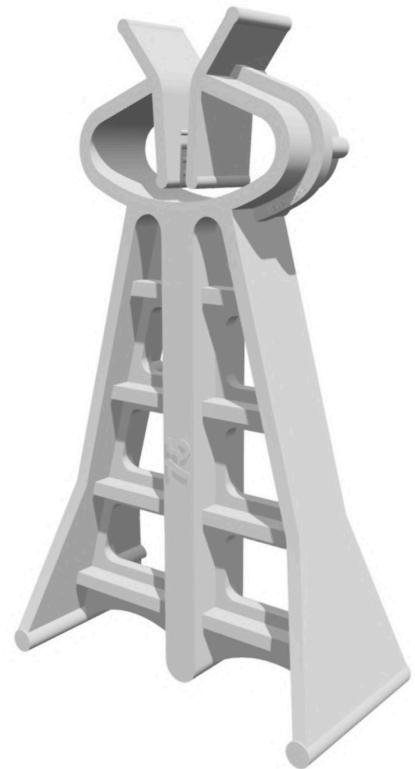

GREEN BUILDING Recycled Material	EASY TO WORK No Binding Wiring	VERY LIGHT 10 times lighter than concrete spacers	CUT COST Save 30-70% compared to concrete spacers
--	--	---	---

PRODUCT NAME	75 mm Clip Spacer
PRODUCT REFERENCE CODE	75AHD
COVER HEIGHTS	75 mm
REBAR DIAMETER	6-18 mm (bar size #2 to #6)
SPACER WEIGHT	17 grams
MATERIAL	Polypropylene (PP)
COLOR	Black
TEMPERATURE RESISTANCE	+120 °C
LOAD RESISTANCE	300 kg
PACKING QUANTITY	800 pcs
BOX DIMENSION (H x W x D)	45 x 60 x 40 cm



INSTALLATION GUIDE



PRODUCED IN DUBAI FOR GCC



RECYCLED MATERIAL 100% RECYCLABLE







ISO 9001:2015 QMS
ISO 14001:2015 EMS
ISO 45001:2018 OHSMS



DESIGN

Fully compliant to CRSI Manual of Standard Practice (USA)
300% exceeds requirements of DIN1045 (Germany) for Class 2 Plastic Rebar Spacers

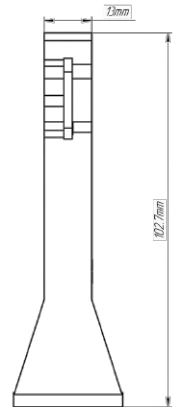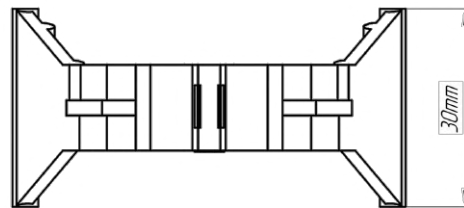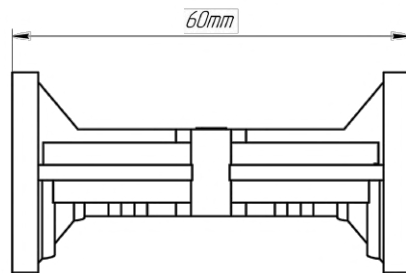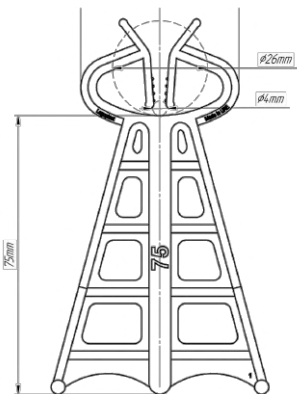

SPECIFICATION

#	Parameter	Unit	Value
1	Concrete cover	mm	75
2	Bar size (diameter)	mm	6-18
3	Item weight	gm	17
4	Height	mm	102.7
5	Width	mm	60
6	Depth	mm	30

PRODUCT DESCRIPTION

Heavy-duty plastic clip spacer (also named 'A' Shape Spacer) designed to accept bars from 6 to 18 mm. 300% exceeds requirements of German performance class L2. Fully compliant to CRSI Manual of Standard Practice (USA). Recommended installation at 50 to 100 cm intervals. The spacer can be used for various applications in pre-cast or insitu concrete.

FACTORY ADDRESS

Legoplast Plastic Manufacturing L.L.C, 68 Street, warehouse S02 near building 27, Jabal Ali Industrial First, Dubai, United Arab Emirates, Makani № 1157464307, Land DM № (Plot №) 599-1138

Note: This certify that the above item was tested and verified according to Legoplast Plastic Manufacturing L.L.C test procedure.